


BackLED and BoxLED mounting profiles

Accessories for LED Modules for advertising and backlighting

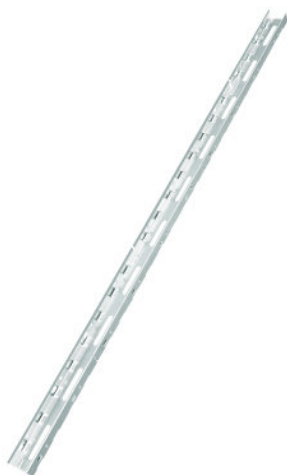

Características del producto

- Perfil de montaje de aplicación universal para cajas de luz simples o de dos lados
- Longitud total: 2.000 mm

Beneficios del producto

- Puede acortarse fácilmente a cualquier longitud
- Montaje rápido y sencillo del perfil con tornillos autorroscantes o remaches pop
- Fijación rápida y simple por encaje a presión de los módulos LED, sin necesidad de herramientas
- Perfil de aluminio robusto

Áreas de aplicación

- Publicidad y rótulos


Hoja de datos gama de productos

Datos técnicos

Dimensiones y peso

Descripción del producto	Peso del producto
BA -SM-MP	180,00 g

Dibujo del producto

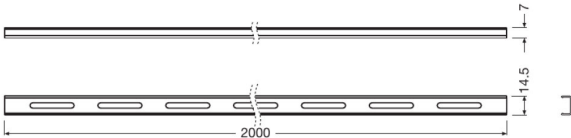

BA -SM-MP

Datos logísticos

Descripción del producto	Número estadístico de material
BA -SM-MP	76169990990

Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)

Descripción del producto	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
BA -SM-MP	18-02-2022	4052899264540	No declarable substances contained

Hoja de datos gama de productos

Descripción del producto	Declaration No. in SCIP database
BA -SM-MP	No declarable substances contained

Consejos de aplicación

Para más información detallada sobre la aplicación y gráficos vea la hoja de datos del producto.

Soporte ventas y técnico

Soporte ventas y técnico www.osram.es

Descarga datos

Fichero
 Datos CAD 652650_CAD Daten MS Plus G15 mounting profile_IGS
 Datos CAD 652651_CAD Daten MS Plus G15 mounting profile_STEP
 Datos CAD PDF 652657_CAD Daten MS Plus G15 mounting profile_pdf

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Hoja de datos gama de productos

Logistical Data

Código del producto	Descripción del producto	Unidad de embalaje (Piezas/unidad)	Dimensiones (largo x ancho x alto)	Volúmen	Peso bruto
4052899264540	BA -SM-MP	Embalaje de envío 24	2020 mm x 64 mm x 43 mm	5.56 dm ³	4536.00 g

El código del producto mencionado describe la unidad más pequeña de la cantidad que se puede pedir. Una unidad de envío puede contener uno o más productos individuales. Al cursar un pedido, introduzca la cantidad de la unidad de envío o su múltiple.

Aviso

Sujeto a cambios sin aviso. Excepto errores y omisiones. Asegúrese de utilizar la emisión más reciente.