

SPD 10 275 -D

SPD /275/ D | Surge protection device



Características del producto

- High surge protection for all lighting applications
- Failure indication LED
- Mains voltage up to 275 V
- Voltage protection level for connected LED driver <1.5 kV
- Push-in terminal

Beneficios del producto

- Several protection level options for different applications
- Securing uptime of your outdoor lighting installation from overvoltage pulses
- Fully compliant with IEC 61643-11

Áreas de aplicación

- Iluminación de calles y urbana
- Industry lighting
- Aplicaciones en exteriores


Datos técnicos

Datos eléctricos

Suitable for power grids	TN
Surge protection voltage(L-N)	10 kV
Nominal discharge current (L-N)	5 kA
Max. voltage protection level (Up, L-N)	1,5 kV
Power losses (% of total system power)	0,1 %
Surge withstand capability	10kA / 5kA / 3kA ¹⁾
End of life indication (by LED light)	YES
Over current protection	15 A
Open-circuit voltage	10 kV

¹⁾ 1strike / 30strike / 50strike

Dimensiones y peso

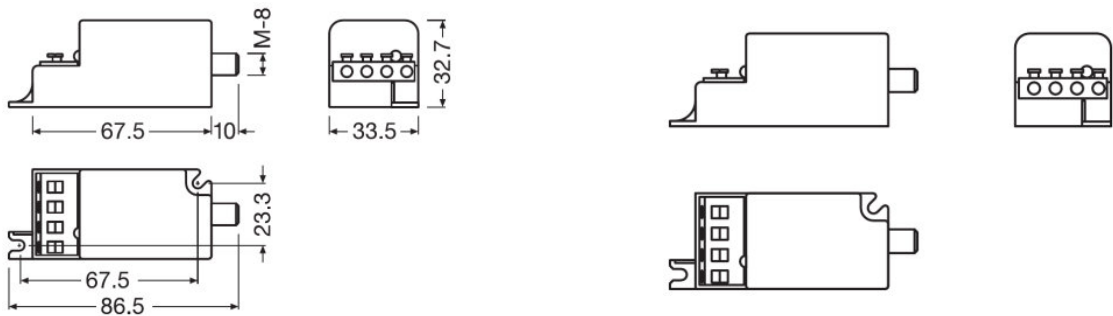

Peso del producto	8500 g
Largo	865 mm
Ancho	335 mm
Alto	327 mm

Datos logísticos

Número estadístico de material	85044083900
--------------------------------	-------------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (RECh)	
Date of Declaration	23-12-2021
Primary Article Identifier	4062172110037
Candidate List Substance 1	Lead

Hoja de datos de producto

CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	cfbfa9e-8021-4aab-a593-edc4c09a07a6

Descarga datos

Fichero	
	User instruction Surge Protection Device
	Declaración de conformidad SPD 275 P5 D UK DoC 4291496 270923
	Declaración de conformidad SPD 10 15 CE 3597923 070923

Logistical Data

Código del producto	Descripción del producto	Unidad de embalaje (Piezas/unidad)	Dimensiones (largo x ancho x alto)	Volúmen	Peso bruto
4062172110037	SPD 10 275 -D	Embalaje de envío 60	395 mm x 245 mm x 120 mm	11.61 dm ³	5517.00 g

El código del producto mencionado describe la unidad más pequeña de la cantidad que se puede pedir. Una unidad de envío puede contener uno o más productos individuales. Al cursar un pedido, introduzca la cantidad de la unidad de envío o su múltiple.

Aviso

OSRAM products must never be directly exposed to external influences. Always provide adequate protection for relevant applications (covers, housings etc.) otherwise any warranty claim will be invalid.