

GINOLED Colormix DIFFUSE Flex-TOP



Características del producto

- RGB with diffuse TOP view solution
- Extremely flat profile for slimline project
- Uniform & even light source with invisible light dots
- Up to 50,000 hrs lifetime @ tc max

Beneficios del producto

- IP67 protection for truly outdoor application
- 120° viewing angle per module
- Continuous length up to 8 m by powering one end

Áreas de aplicación

- Iluminación de acento
- Iluminación de bóvedas
- Architectural lighting
- Iluminación decorativa
- Border lighting
- Señalización
- Outdoor and indoor contour lighting



Datos técnicos


Datos Fotométricos

Descripción del producto	Flujo luminoso	Flujo luminoso por metro
GFDT400RGB G1-RGB-05	1900 lm	380 lm

Dimensiones y peso

Descripción del producto	Peso del producto	Largo	Ancho	Alto
GFDT400RGB G1-RGB-05	1825,00 g	5000 mm	16,5 mm	17,0 mm

Dibujo del producto

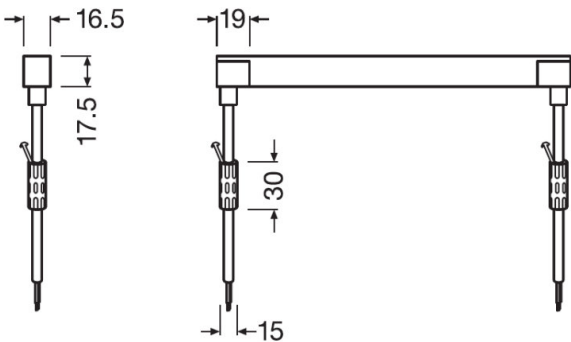

GFDT400RGB G1-RGB-05

Datos logísticos

Descripción del producto	Número estadístico de material
GFDT400RGB G1-RGB-05	85395100000

Hoja de datos gama de productos

Environmental information
Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)

Descripción del producto	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
GFDT400RGB G1-RGB-05	25-08-2023	4062172106351	No declarable substances contained

Descripción del producto	Declaration No. in SCIP database
GFDT400RGB G1-RGB-05	No declarable substances contained

Consejos de aplicación

Para más información detallada sobre la aplicación y gráficos vea la hoja de datos del producto.

Soporte ventas y técnico

Soporte ventas y técnico www.osram.es

Descarga datos

Fichero	
	User instruction GinoLED RGB Diffuse TOP Flex
	Anexo TI GFDT RGB - Specification sheet
	Declaración de conformidad GFDT400 RGB G1

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Código del producto	Descripción del producto	Unidad de embalaje (Piezas/unidad)	Dimensiones (largo x ancho x alto)	Volumen	Peso bruto
4062172106351	GFDT400RGB G1-RGB-05	Embalaje de envío 3	630 mm x 520 mm x 181 mm	59.30 dm ³	9110.00 g

El código del producto mencionado describe la unidad más pequeña de la cantidad que se puede pedir. Una unidad de envío puede contener uno o más productos individuales. Al cursar un pedido, introduzca la cantidad de la unidad de envío o su múltiple.

Aviso

Sujeto a cambios sin aviso. Excepto errores y omisiones. Asegúrese de utilizar la emisión más reciente.