

LR-P-1500 -RGBW840-10S-BK-15-TB-G12L

LINEARlight Rigid FINESSE |



Características del producto

- Slim, modular LED fixture for linear applications, fully customizable
- Several optics, Wall Grazing and WallWashing; 10°, 30°, 60°
- Outdoor IP67 or Indoor IP43 versions available
- Large operating temperature range: from -30 ° to +50 ° Celsius
- Luminous flux: > 2000 lm/m; 1200 m/m; 900 lm/m
- Color uniformity ≤ 2 SDCM
- Lifetime up to 60.000 h L80B10; LM80 and LM79
- Large selection of color temperatures: 2400 K – 5000 K; CRI 80, CRI 90
- Dimmable by OPTOTRONIC LED driver from 0 % to 100 %
- Designed in Italy, made in Germany
- Durable, coated aluminum profile resistant to harsh environments: AMA

Beneficios del producto

- 15 lengths available to adapt to all conditions
- Easy to configure the desired light performance for optimal illumination
- Protected against the atmospheric agents: from the desert to the glacier
- Long-time functionality and maintenance-free
- High color fidelity to beautify every design
- Fully controllable by most used light control protocols: DALI, DMX
- Color consistent with LINEARlight FLEX products
- Several installation accessories available



Hoja de datos de producto

Áreas de aplicación

- Wall Grazing
- Ambient lighting
- Wall washing
- Iluminación de bóvedas
- Architectural integration

Hoja de datos de producto

Datos técnicos

Información de producto

Referencia para pedido	LR-P-1500-RGBW8
------------------------	-----------------

Datos eléctricos

Accidental reverse input voltage protection up to	25 V
---	------


Datos Fotométricos

Temperatura de color	4000 K
Flujo luminoso	2500 lm
Tono de luz (denominación)	RGBW
Índice de reproducción cromática Ra	80
Eficacia de la luminaria	0,56
Temperatura de color	4000 K

Datos técnicos de iluminación

Ángulo de radiación	10 °
---------------------	------

Dimensiones y peso

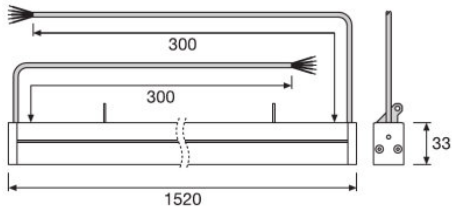

Largo	0,0 mm
Alto	33,0 mm
Peso del producto	1500,00 g
Peso del producto	0

Colores y materiales

Material del cuerpo	Aluminio
Color del producto	Gris
Material cobertura	Policarbonato (PC)

Hoja de datos de producto

Temp. y condiciones de funcionamiento

Margen de temperatura ambiente	-20...+50 °C
--------------------------------	--------------

Duración de vida

Duración	60000 h
----------	---------

Capacidades

Ajustable	No
Regulable	Sí
Control del color (RGB)	Sí
Tecnología LIGHTIFY	No

Certificados & Normas

Tipo de protección	IP67
--------------------	------

Categorías específicas del país

Referencia para pedido	LR-P-1500-RGBW8
------------------------	-----------------

Datos logísticos

Número estadístico de material	94051190900
--------------------------------	-------------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	28-06-2022
Primary Article Identifier	4062172226974
Declaration No. in SCIP database	In work

Descarga datos

Fichero	
	User instruction FINESSE
	User instruction FINESSE RGB RGBW
	Product Datasheet LINEARlight RIGID FINESSE (EN)
	Product Datasheet LINEARlight RIGID FINESSE RGB (W) (EN)

Hoja de datos de producto

	Folleto de ventas Light is awesome - LINEARlight Rigid FINESSE (EN)
	Certificados Finesse LR P fixed CB 04032022
	Certificados Finesse LR P fixed D 04032022
	Certificados Finesse LR P fixed ENEC
	Certificados Finesse LR P floodligh CB 04032022
	Certificados Finesse LR P floodligh D 04032022
	Certificados Finesse LR P floodligh ENEC 04032022
	Eulumdat LR-P-1500-RGBW930-10B-XX-10-G1 Blue LTD
	Eulumdat LR-P-1500-RGBW930-10B-XX-10-G1 Green LTD
	Eulumdat LR-P-1500-RGBW930-10B-XX-10-G1 Red LTD
	Eulumdat LR-P-1500-RGBW930-10B-XX-10-G1 White LTD
	Eulumdat LR-P-1500-RGBW930-10S-XX-10-G1 Blue LTD
	Eulumdat LR-P-1500-RGBW930-10S-XX-10-G1 Green LTD
	Eulumdat LR-P-1500-RGBW930-10S-XX-10-G1 Red LTD
	Eulumdat LR-P-1500-RGBW930-10S-XX-10-G1 White LTD
	Eulumdat LR-P-1500-RGBW930-120D-XX-10-G1 Blue LTD
	Eulumdat LR-P-1500-RGBW930-120D-XX-10-G1 Green LTD
	Eulumdat LR-P-1500-RGBW930-120D-XX-10-G1 Red LTD
	Eulumdat LR-P-1500-RGBW930-120D-XX-10-G1 White LTD
	Eulumdat LR-P-1500-RGBW930-30S-XX-10-G1 Blue LTD
	Eulumdat LR-P-1500-RGBW930-30S-XX-10-G1 Green LTD
	Eulumdat LR-P-1500-RGBW930-30S-XX-10-G1 Red LTD
	Eulumdat LR-P-1500-RGBW930-30S-XX-10-G1 White LTD

Hoja de datos de producto

	Eulumdat LR-P-1500-RGBW930-WW-XX-10-G1 Blue LTD
	Eulumdat LR-P-1500-RGBW930-WW-XX-10-G1 Green LTD
	Eulumdat LR-P-1500-RGBW930-WW-XX-10-G1 Red LTD
	Eulumdat LR-P-1500-RGBW930-WW-XX-10-G1 White LTD
	IES data LR-P-1500-RGBW930-10B-XX-10-G1 Blue IES
	IES data LR-P-1500-RGBW930-10B-XX-10-G1 Green IES
	IES data LR-P-1500-RGBW930-10B-XX-10-G1 Red IES
	IES data LR-P-1500-RGBW930-10B-XX-10-G1 White IES
	IES data LR-P-1500-RGBW930-10S-XX-10-G1 Blue IES
	IES data LR-P-1500-RGBW930-10S-XX-10-G1 Green IES
	IES data LR-P-1500-RGBW930-10S-XX-10-G1 Red IES
	IES data LR-P-1500-RGBW930-10S-XX-10-G1 White IES
	IES data LR-P-1500-RGBW930-120D-XX-10-G1 Blue IES
	IES data LR-P-1500-RGBW930-120D-XX-10-G1 Green IES
	IES data LR-P-1500-RGBW930-120D-XX-10-G1 Red IES
	IES data LR-P-1500-RGBW930-120D-XX-10-G1 White IES
	IES data LR-P-1500-RGBW930-30S-XX-10-G1 Blue IES
	IES data LR-P-1500-RGBW930-30S-XX-10-G1 Green IES
	IES data LR-P-1500-RGBW930-30S-XX-10-G1 Red IES
	IES data LR-P-1500-RGBW930-30S-XX-10-G1 White IES
	IES data LR-P-1500-RGBW930-WW-XX-10-G1 Blue IES
	IES data LR-P-1500-RGBW930-WW-XX-10-G1 Green IES
	IES data LR-P-1500-RGBW930-WW-XX-10-G1 Red IES

	IES data LR-P-1500-RGBW930-WW-XX-10-G1 White IES
---	---

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Código del producto	Descripción del producto	Unidad de embalaje (Piezas/unidad)	Dimensiones (largo x ancho x alto)	Volúmen	Peso bruto
4062172226974	LR-P-1500 -RGBW840-10S-BK-15-TB-G12L	Embalaje de envío 6	1638 mm x 121 mm x 111 mm	22.00 dm ³	10043.00 g

El código del producto mencionado describe la unidad más pequeña de la cantidad que se puede pedir. Una unidad de envío puede contener uno o más productos individuales. Al cursar un pedido, introduzca la cantidad de la unidad de envío o su múltiple.

Aviso

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.