


BackLED Area Tunable White

Módulos LED para iluminación publicitaria y trasera

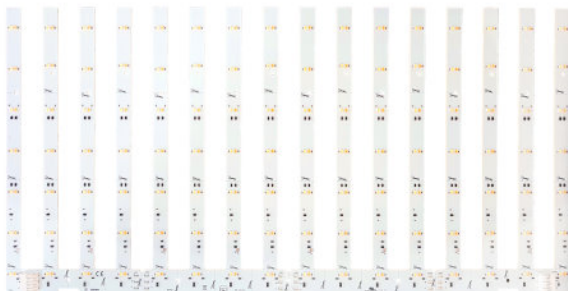

Características del producto

- Módulos LED de 24 V constantes
- Tunable white 2700K-6500K for dynamic white applications
- Índice de reproducción cromática R_a : > 90
- Pitch del LED constante incluso en interconexiones de base
- Cuttable, single board for an exact fit in any installation
- Product only compatible with DALI DT8 drivers (TW) or OSRAM BLE devices with OSRAM TW lamp profiles

Beneficios del producto

- Proporciona una luz homogénea y apta para aplicaciones en luminarias
- Easy wiring with push-in connectors
- Bajo consumo de energía y menor generación de calor
- Optimal operation on OPTOTRONIC 24VDC and 24VDC dimmable power supplies

Áreas de aplicación

- Iluminación de área
- Techos de luz
- Hospitalidad, hoteles, restaurantes
- Simulación de luz diurna

Hoja de datos gama de productos

Consejos de aplicación

Para más información detallada sobre la aplicación y gráficos vea la hoja de datos del producto.

Texto de la hoja técnica

- This product must be operated by a DALI DT8 power supply or OSRAM BLE devices in TW profile

Soporte ventas y técnico

Soporte ventas y técnico www.osram.es

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Aviso

Sujeto a cambios sin aviso. Excepto errores y omisiones. Asegúrese de utilizar la emisión más reciente.