

TEC Flex Protect Tunable White

Módulos LED para aplicaciones semi profesionales

Características del producto

- Regleta LED flexible y recortable
- Color consistency in 3 SDCM
- Up to 50,000 hrs lifetime @ tc max



Beneficios del producto

- Montaje sencillo en numerosas superficies lisas gracias a la cinta autoadhesiva en el lado posterior

Áreas de aplicación

- Iluminación dinámica de ambiente




Hoja de datos gama de productos

Datos técnicos

Dimensiones y peso

Descripción del producto	Largo	Ancho	Alto	Peso del producto
TFP2000TW -G1-827.865-05	5000,0 mm	11,1 mm	4,10 mm	305,00 g

Dibujo del producto

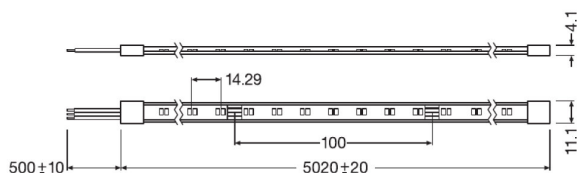

TFP2000TW -G1-827.865-05

Certificados & Normas

Descripción del producto	Energy efficiency class of the contained light source
TFP2000TW -G1-827.865-05	E

Datos logísticos

Descripción del producto	Número estadístico de material
TFP2000TW -G1-827.865-05	940540399000

Hoja de datos gama de productos








Consejos de aplicación

Para más información detallada sobre la aplicación y gráficos vea la hoja de datos del producto.

Soporte ventas y técnico

Soporte ventas y técnico www.osram.es

Descarga datos

Fichero	
	User instruction TEC Flex Protect Tunable White, TEC Flex Protect RGB
	Product Datasheet TEC Flex Tunable White IP66 product datasheet (EN)
	Folleto de ventas Light is strong - Discover the versatile and flexible lighting system OSRAM 24V TEC Flex (EN)
	Certificados TEC Flex TW CE 4228593 210820
	Certificados TF(P)2000TW ENEC 071020
	Eulumdat Eulumdat TFP2000TW-LDT
	IES data Eulumdat TFP2000TW-IES

Hoja de datos gama de productos

Ecodesign regulation information:

ul>This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015. Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.

In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer.

In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.

Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Código del producto	Descripción del producto	Unidad de embalaje (Piezas/unidad)	Dimensiones (largo x ancho x alto)	Volúmen	Peso bruto
4062172154260	TFP2000TW -G1-827.865-05	Embalaje de envío 10	280 mm x 305 mm x 180 mm	15.37 dm ³	4024.00 g

El código del producto mencionado describe la unidad más pequeña de la cantidad que se puede pedir. Una unidad de envío puede contener uno o más productos individuales. Al cursar un pedido, introduzca la cantidad de la unidad de envío o su múltiple.

Aviso

Sujeto a cambios sin aviso. Excepto errores y omisiones. Asegúrese de utilizar la emisión más reciente.