

GINOLED FLEX Diffuse Side



Características del producto

- 3 SDCM, CRI80
- Large selection of lighting color temperatures
- 110° viewing angle per module
- Up to 50,000 h lifetime @ tc max

Beneficios del producto

- Cut to length each 41.7 mm
- 10x10 mm super slim design, fit for embedded applications
- Diffuse version, side emitting, high light uniformity without spot or dark area
- IP67 protection for truly outdoor application

Áreas de aplicación

- Outdoor and indoor contour lighting
- Señalización
- Iluminación de bóvedas
- Iluminación decorativa
- Architectural lighting
- Iluminación de acento



Datos técnicos

Datos eléctricos

Descripción del producto	Nivel de potencia nominal por metro
GFDS400-G1 827-05	6,0 W
GFDS400-G1 830-01	6,0 W
GFDS400-G1 830-05	6,0 W
GFDS400-G1 835-01	6,0 W
GFDS400-G1 835-05	6,0 W
GFDS400-G1 840-01	6,0 W
GFDS400-G1 840-05	6,0 W
GFDS400-G1 850-01	6,0 W
GFDS400-G1 850-05	6,0 W
GFDS400-G1 857-01	6,0 W
GFDS400-G1 857-05	6,0 W
GFDS600-G1 827-01	9,0 W
GFDS600-G1 827-05	9,0 W
GFDS600-G1 830-01	9,0 W
GFDS600-G1 830-05	9,0 W
GFDS600-G1 835-01	9,0 W
GFDS600-G1 835-05	9,0 W
GFDS600-G1 840-01	9,0 W
GFDS600-G1 840-05	9,0 W
GFDS600-G1 850-01	9,0 W
GFDS600-G1 850-05	9,0 W
GFDS600-G1 857-01	9,0 W
GFDS600-G1 857-05	9,0 W

Datos Fotométricos

Descripción del producto	Temperatura de color	Índice de reproducción cromática Ra	Tono de luz (denominación)	Desviación estándar de ajuste de color	Flujo luminoso por metro	Flujo luminoso total útil
GFDS400-G1 827-05	2700 K	80	2700 K	≤3 sdc	410 lm	2050 lm
GFDS400-G1 830-01	3000 K	80	3000 K	≤3 sdc	410 lm	410 lm
GFDS400-G1 830-05	3000 K	80	3000 K	≤3 sdc	410 lm	2050 lm
GFDS400-G1 835-01	3500 K	80	3500 K	≤3 sdc	440 lm	440 lm
GFDS400-G1 835-05	3500 K	80	3500 K	≤3 sdc	440 lm	2200 lm
GFDS400-G1 840-01	4000 K	80	4000 K	≤3 sdc	440 lm	440 lm
GFDS400-G1 840-05	4000 K	80	4000 K	≤3 sdc	440 lm	2200 lm
GFDS400-G1 850-01	5000 K	80	5000 K	≤3 sdc	430 lm	430 lm
GFDS400-G1 850-05	5000 K	80	5000 K	≤3 sdc	430 lm	2150 lm
GFDS400-G1 857-01	5700 K	80	5700 K	≤3 sdc	425 lm	425 lm

Hoja de datos gama de productos

Descripción del producto	Temperatura de color	Índice de reproducción cromática Ra	Tono de luz (denominación)	Desviación estándar de ajuste de color	Flujo luminoso por metro	Flujo luminoso total útil
GFDS400-G1 857-05	5700 K		5700 K		425 lm	
GFDS600-G1 827-01	2700 K	80	2700 K	≤3 sdc	620 lm	620 lm
GFDS600-G1 827-05	2700 K	80	2700 K	≤3 sdc	620 lm	3100 lm
GFDS600-G1 830-01	3000 K	80	3000 K	≤3 sdc	620 lm	620 lm
GFDS600-G1 830-05	3000 K	80	3000 K	≤3 sdc	620 lm	3100 lm
GFDS600-G1 835-01	3500 K	80	3500 K	≤3 sdc	640 lm	640 lm
GFDS600-G1 835-05	3500 K	80	3500 K	≤3 sdc	640 lm	3200 lm
GFDS600-G1 840-01	4000 K	80	4000 K	≤3 sdc	640 lm	640 lm
GFDS600-G1 840-05	4000 K	80	4000 K	≤3 sdc	640 lm	3200 lm
GFDS600-G1 850-01	5000 K	80	5000 K	≤3 sdc	630 lm	630 lm
GFDS600-G1 850-05	5000 K		5000 K		630 lm	
GFDS600-G1 857-01	5700 K	80	5700 K	≤3 sdc	600 lm	600 lm
GFDS600-G1 857-05	5700 K		5700 K		600 lm	

Datos técnicos de iluminación

Descripción del producto	LED pitch	Tiempo de arranque	Ángulo de radiación	Tiempo de precalentamiento (60 %)
GFDS400-G1 827-05	6.95 mm	00 s	0 °	000 s
GFDS400-G1 830-01	6.95 mm	00 s	110 °	000 s
GFDS400-G1 830-05	6.95 mm	00 s	110 °	000 s
GFDS400-G1 835-01	6.95 mm	0,0 s	110 °	0,00 s
GFDS400-G1 835-05	6.95 mm	00 s	110 °	000 s
GFDS400-G1 840-01	6.95 mm	00 s	110 °	000 s
GFDS400-G1 840-05	6.95 mm	00 s	110 °	000 s
GFDS400-G1 850-01	6.95 mm	0,0 s	110 °	0,00 s
GFDS400-G1 850-05	6.95 mm	0,0 s	110 °	0,00 s
GFDS400-G1 857-01	6.95 mm	00 s	110 °	000 s
GFDS400-G1 857-05	6.95 mm		110 °	
GFDS600-G1 827-01	6.95 mm	00 s	0 °	000 s
GFDS600-G1 827-05	6.95 mm	00 s	0 °	000 s
GFDS600-G1 830-01	6.95 mm	00 s	110 °	000 s
GFDS600-G1 830-05	6.95 mm	00 s	110 °	000 s
GFDS600-G1 835-01	6.95 mm	00 s	110 °	000 s
GFDS600-G1 835-05	6.95 mm	0,0 s	110 °	0,00 s
GFDS600-G1 840-01	6.95 mm	00 s	110 °	000 s
GFDS600-G1 840-05	6.95 mm	00 s	110 °	000 s
GFDS600-G1 850-01	6.95 mm	0,0 s	110 °	0,00 s
GFDS600-G1 850-05	6.95 mm		110 °	
GFDS600-G1 857-01	6.95 mm	00 s	110 °	000 s
GFDS600-G1 857-05	6.95 mm		110 °	

Información módulos LED

Descripción del producto	Número de LED por unidad más pequeña	Número de LEDs por metro
GFDS400-G1 827-05	6	144
GFDS400-G1 830-01	6	144
GFDS400-G1 830-05	6	144
GFDS400-G1 835-01	6	144
GFDS400-G1 835-05	6	144
GFDS400-G1 840-01	6	144
GFDS400-G1 840-05	6	144
GFDS400-G1 850-01	6	144
GFDS400-G1 850-05	6	144
GFDS400-G1 857-01	6	144
GFDS400-G1 857-05	6	144
GFDS600-G1 827-01	6	144
GFDS600-G1 827-05	6	144
GFDS600-G1 830-01	6	144
GFDS600-G1 830-05	6	144
GFDS600-G1 835-01	6	144
GFDS600-G1 835-05	6	144
GFDS600-G1 840-01	6	144
GFDS600-G1 840-05	6	144
GFDS600-G1 850-01	6	144
GFDS600-G1 850-05	6	144
GFDS600-G1 857-01	6	144
GFDS600-G1 857-05	6	144


Dimensiones y peso

Descripción del producto	Peso del producto	Longitud – unidad más pequeña	Largo	Ancho	Alto	Longitud del cable
GFDS400-G1 827-05	65000 g	41.7 mm	5000 mm	110 mm	105 mm	6650
GFDS400-G1 830-01	13000 g	41.7 mm	1000 mm	110 mm	105 mm	6650
GFDS400-G1 830-05	65000 g	41.7 mm	5000 mm	110 mm	105 mm	6650
GFDS400-G1 835-01	130,00 g	41.7 mm	1000 mm	11,0 mm	10,5 mm	665,0
GFDS400-G1 835-05	65000 g	41.7 mm	5000 mm	110 mm	105 mm	6650
GFDS400-G1 840-01	13000 g	41.7 mm	1000 mm	110 mm	105 mm	6650
GFDS400-G1 840-05	65000 g	41.7 mm	5000 mm	110 mm	105 mm	6650
GFDS400-G1 850-01	130,00 g	41.7 mm	1000 mm	11,0 mm	10,5 mm	665,0
GFDS400-G1 850-05	650,00 g	41.7 mm	5000 mm	11,0 mm	10,5 mm	665,0
GFDS400-G1 857-01	13000 g	41.7 mm	1000 mm	110 mm	105 mm	6650
GFDS400-G1 857-05		41.7 mm	NaN mm	NaN mm	10,5 mm	
GFDS600-G1 827-01	13000 g	41.7 mm	1000 mm	110 mm	105 mm	6650
GFDS600-G1 827-05	65000 g	41.7 mm	5000 mm	110 mm	105 mm	6650

Hoja de datos gama de productos

Descripción del producto	Peso del producto	Longitud – unidad más pequeña	Largo	Ancho	Alto	Longitud del cable
GFDS600-G1 830-01	13000 g	41.7 mm	1000 mm	110 mm	105 mm	6650
GFDS600-G1 830-05	65000 g	41.7 mm	5000 mm	110 mm	105 mm	6650
GFDS600-G1 835-01	13000 g	41.7 mm	1000 mm	110 mm	105 mm	6650
GFDS600-G1 835-05	650,00 g	41.7 mm	5000 mm	11,0 mm	10,5 mm	665,0
GFDS600-G1 840-01	13000 g	41.7 mm	1000 mm	110 mm	105 mm	6650
GFDS600-G1 840-05	65000 g	41.7 mm	5000 mm	110 mm	105 mm	6650
GFDS600-G1 850-01	130,00 g	41.7 mm	1000 mm	11,0 mm	10,5 mm	665,0
GFDS600-G1 850-05		41.7 mm	NaN mm	NaN mm	10,5 mm	
GFDS600-G1 857-01	13000 g	41.7 mm	1000 mm	110 mm	105 mm	6650
GFDS600-G1 857-05		41.7 mm	NaN mm	NaN mm	10,5 mm	

Dibujo del producto

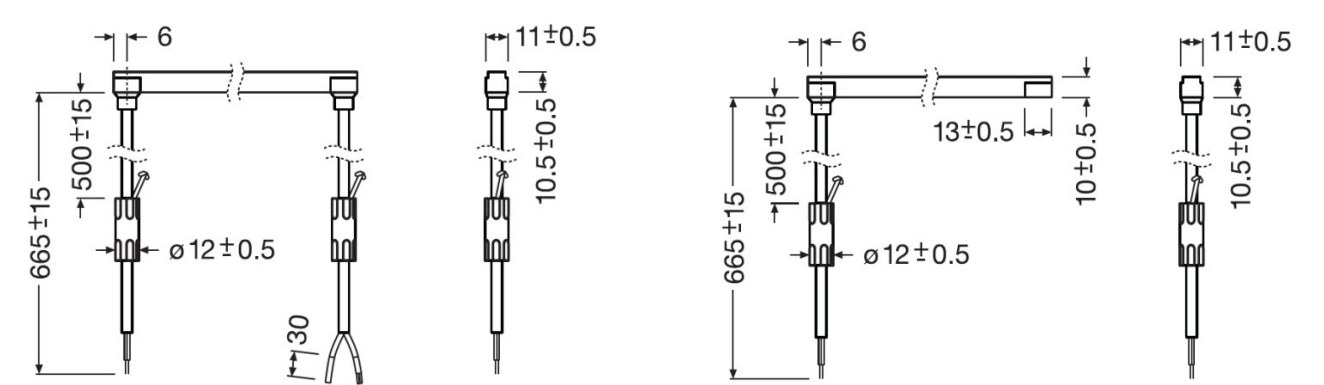

GFDS400-G1 827-05, GFDS400-G1 830-05, GFDS400-G1 835-05, GFDS400-G1 840-05, GFDS400-G1 850-05, GFDS400-G1 857-05, GFDS600-G1 827-05, GFDS600-G1 830-05, GFDS600-G1 835-05, GFDS600-G1 840-05, GFDS600-G1 850-05, GFDS600-G1 857-05

GFDS400-G1 830-01, GFDS400-G1 835-01, GFDS400-G1 840-01, GFDS400-G1 850-01, GFDS400-G1 857-01, GFDS600-G1 827-01, GFDS600-G1 830-01, GFDS600-G1 835-01, GFDS600-G1 840-01, GFDS600-G1 850-01, GFDS600-G1 857-01

Colores y materiales

Descripción del producto	Material del cuerpo	Material cobertura
GFDS400-G1 827-05	Silicone	Silicone
GFDS400-G1 830-01	Silicone	Silicone
GFDS400-G1 830-05	Silicone	Silicone

Hoja de datos gama de productos

Descripción del producto	Material del cuerpo	Material cobertura
GFDS400-G1 835-01	Silicone	Silicone
GFDS400-G1 835-05	Silicone	Silicone
GFDS400-G1 840-01	Silicone	Silicone
GFDS400-G1 840-05	Silicone	Silicone
GFDS400-G1 850-01	Silicone	Silicone
GFDS400-G1 850-05	Silicone	Silicone
GFDS400-G1 857-01	Silicone	Silicone
GFDS400-G1 857-05	Silicone	Silicone
GFDS600-G1 827-01	Silicone	Silicone
GFDS600-G1 827-05	Silicone	Silicone
GFDS600-G1 830-01	Silicone	Silicone
GFDS600-G1 830-05	Silicone	Silicone
GFDS600-G1 835-01	Silicone	Silicone
GFDS600-G1 835-05	Silicone	Silicone
GFDS600-G1 840-01	Silicone	Silicone
GFDS600-G1 840-05	Silicone	Silicone
GFDS600-G1 850-01	Silicone	Silicone
GFDS600-G1 850-05	Silicone	Silicone
GFDS600-G1 857-01	Silicone	Silicone
GFDS600-G1 857-05	Silicone	Silicone

Temp. y condiciones de funcionamiento

Descripción del producto	Margen de temperatura ambiente	Rendimiento temp. según norma IEC 62717
GFDS400-G1 827-05	-40...+55 °C	RG0
GFDS400-G1 830-01	-40...+55 °C	RG0
GFDS400-G1 830-05	-40...+55 °C	RG0
GFDS400-G1 835-01	-40...+55 °C	RG0
GFDS400-G1 835-05	-40...+55 °C	RG0
GFDS400-G1 840-01	-40...+55 °C	RG0
GFDS400-G1 840-05	-40...+55 °C	RG0
GFDS400-G1 850-01	-40...+55 °C	RG0
GFDS400-G1 850-05	-40...+55 °C	RG0
GFDS400-G1 857-01	-40...+55 °C	RG0
GFDS400-G1 857-05	-40...+55 °C	RG0
GFDS600-G1 827-01	-40...+55 °C	RG0
GFDS600-G1 827-05	-40...+55 °C	RG0
GFDS600-G1 830-01	-40...+55 °C	RG0
GFDS600-G1 830-05	-40...+55 °C	RG0
GFDS600-G1 835-01	-40...+55 °C	RG0
GFDS600-G1 835-05	-40...+55 °C	RG0
GFDS600-G1 840-01	-40...+55 °C	RG0
GFDS600-G1 840-05	-40...+55 °C	RG0
GFDS600-G1 850-01	-40...+55 °C	RG0

Hoja de datos gama de productos

Descripción del producto	Margen de temperatura ambiente	Rendimiento temp. según norma IEC 62717
GFDS600-G1 850-05	-40...+55 °C	RG0
GFDS600-G1 857-01	-40...+55 °C	RG0
GFDS600-G1 857-05	-40...+55 °C	RG0

Duración de vida

Descripción del producto	Vida útil nominal lámpara	Factor manten.lumen final vida útil nomi	Vida útil lámpara	Número de ciclos de encendidos
GFDS400-G1 827-05	50000 h	070	50000 h	15000
GFDS400-G1 830-01	50000 h	070	50000 h	15000
GFDS400-G1 830-05	50000 h	070	50000 h	15000
GFDS400-G1 835-01	50000 h	0,70	50000 h	15000
GFDS400-G1 835-05	50000 h	070	50000 h	15000
GFDS400-G1 840-01	50000 h	070	50000 h	15000
GFDS400-G1 840-05	50000 h	070	50000 h	15000
GFDS400-G1 850-01	50000 h	0,70	50000 h	15000
GFDS400-G1 850-05	50000 h	0,70	50000 h	15000
GFDS400-G1 857-01	50000 h	070	50000 h	15000
GFDS400-G1 857-05				
GFDS600-G1 827-01	50000 h	070	50000 h	15000
GFDS600-G1 827-05	50000 h	070	50000 h	15000
GFDS600-G1 830-01	50000 h	070	50000 h	15000
GFDS600-G1 830-05	50000 h	070	50000 h	15000
GFDS600-G1 835-01	50000 h	070	50000 h	15000
GFDS600-G1 835-05	50000 h	0,70	50000 h	15000
GFDS600-G1 840-01	50000 h	070	50000 h	15000
GFDS600-G1 840-05	50000 h	070	50000 h	15000
GFDS600-G1 850-01	50000 h	0,70	50000 h	15000
GFDS600-G1 850-05				
GFDS600-G1 857-01	50000 h	070	50000 h	15000
GFDS600-G1 857-05				

Capacidades

Descripción del producto	Lowest bending radius	With end piece	With connection set
GFDS400-G1 827-05	100 mm	No	Sí
GFDS400-G1 830-01	100 mm	No	Sí
GFDS400-G1 830-05	100 mm	No	Sí
GFDS400-G1 835-01	100 mm	No	Sí
GFDS400-G1 835-05	100 mm	No	Sí
GFDS400-G1 840-01	100 mm	No	Sí
GFDS400-G1 840-05	100 mm	No	Sí
GFDS400-G1 850-01	100 mm	No	Sí

Hoja de datos gama de productos

Descripción del producto	Lowest bending radius	With end piece	With connection set
GFDS400-G1 850-05	100 mm	No	Sí
GFDS400-G1 857-01	100 mm	No	Sí
GFDS400-G1 857-05	100 mm	No	Sí
GFDS600-G1 827-01	100 mm	No	Sí
GFDS600-G1 827-05	100 mm	No	Sí
GFDS600-G1 830-01	100 mm	No	Sí
GFDS600-G1 830-05	100 mm	No	Sí
GFDS600-G1 835-01	100 mm	No	Sí
GFDS600-G1 835-05	100 mm	No	Sí
GFDS600-G1 840-01	100 mm	No	Sí
GFDS600-G1 840-05	100 mm	No	Sí
GFDS600-G1 850-01	100 mm	No	Sí
GFDS600-G1 850-05	100 mm	No	Sí
GFDS600-G1 857-01	100 mm	No	Sí
GFDS600-G1 857-05	100 mm	No	Sí

Descripción del producto	Control interface	Detection angle (Light sensor)	Detection angle (PIR)
GFDS400-G1 827-05	-	-	-
GFDS400-G1 830-01	-	-	-
GFDS400-G1 830-05	-	-	-
GFDS400-G1 835-01	-	-	-
GFDS400-G1 835-05	-	-	-
GFDS400-G1 840-01	-	-	-
GFDS400-G1 840-05	-	-	-
GFDS400-G1 850-01	-	-	-
GFDS400-G1 850-05	-	-	-
GFDS400-G1 857-01	-	-	-
GFDS400-G1 857-05	-	-	-
GFDS600-G1 827-01	-	-	-
GFDS600-G1 827-05	-	-	-
GFDS600-G1 830-01	-	-	-
GFDS600-G1 830-05	-	-	-
GFDS600-G1 835-01	-	-	-
GFDS600-G1 835-05	-	-	-
GFDS600-G1 840-01	-	-	-
GFDS600-G1 840-05	-	-	-
GFDS600-G1 850-01	-	-	-
GFDS600-G1 850-05	-	-	-
GFDS600-G1 857-01	-	-	-
GFDS600-G1 857-05	-	-	-

Certificados & Normas

Descripción del producto	Tipo de protección	Consumo de energía
GFDS400-G1 827-05	IP67	33 kWh/1000h

Hoja de datos gama de productos

Descripción del producto	Tipo de protección	Consumo de energía
GFDS400-G1 830-01	IP67	7 kWh/1000h
GFDS400-G1 830-05	IP67	33 kWh/1000h
GFDS400-G1 835-01	IP67	7 kWh/1000h
GFDS400-G1 835-05	IP67	33 kWh/1000h
GFDS400-G1 840-01	IP67	7 kWh/1000h
GFDS400-G1 840-05	IP67	33 kWh/1000h
GFDS400-G1 850-01	IP67	7 kWh/1000h
GFDS400-G1 850-05	IP67	33 kWh/1000h
GFDS400-G1 857-01	IP67	7 kWh/1000h
GFDS400-G1 857-05	IP67	
GFDS600-G1 827-01	IP67	10 kWh/1000h
GFDS600-G1 827-05	IP67	50 kWh/1000h
GFDS600-G1 830-01	IP67	10 kWh/1000h
GFDS600-G1 830-05	IP67	50 kWh/1000h
GFDS600-G1 835-01	IP67	10 kWh/1000h
GFDS600-G1 835-05	IP67	50 kWh/1000h
GFDS600-G1 840-01	IP67	10 kWh/1000h
GFDS600-G1 840-05	IP67	50 kWh/1000h
GFDS600-G1 850-01	IP67	10 kWh/1000h
GFDS600-G1 850-05	IP67	
GFDS600-G1 857-01	IP67	10 kWh/1000h
GFDS600-G1 857-05	IP67	

Datos logísticos

Descripción del producto	Número estadístico de material
GFDS400-G1 827-05	85395100000
GFDS400-G1 830-01	85395100000
GFDS400-G1 830-05	85395100000
GFDS400-G1 835-01	85395100000
GFDS400-G1 835-05	85395100000
GFDS400-G1 840-01	85395100000
GFDS400-G1 840-05	85395100000
GFDS400-G1 850-01	85395100000
GFDS400-G1 850-05	85395100000
GFDS400-G1 857-01	85395100000
GFDS400-G1 857-05	
GFDS600-G1 827-01	85395100000
GFDS600-G1 827-05	85395100000
GFDS600-G1 830-01	85395100000
GFDS600-G1 830-05	85395100000
GFDS600-G1 835-01	85395100000
GFDS600-G1 835-05	85395100000
GFDS600-G1 840-01	85395100000

Hoja de datos gama de productos

Descripción del producto	Número estadístico de material
GFDS600-G1 840-05	85395100000
GFDS600-G1 850-01	85395100000
GFDS600-G1 850-05	
GFDS600-G1 857-01	853951000000
GFDS600-G1 857-05	

Environmental information

Descripción del producto	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
GFDS400-G1 827-05	24-06-2022	4062172194242	No declarable substances contained
GFDS400-G1 830-01	24-06-2022	4062172207850	No declarable substances contained
GFDS400-G1 830-05	24-06-2022	4062172194648	No declarable substances contained
GFDS400-G1 835-01	24-06-2022	4062172207874	No declarable substances contained
GFDS400-G1 835-05	24-06-2022	4062172194709	No declarable substances contained
GFDS400-G1 840-01	13-05-2022	4062172207898	No declarable substances contained
GFDS400-G1 840-05	13-05-2022	4062172194723	No declarable substances contained
GFDS400-G1 850-01	24-06-2022	4062172207911	No declarable substances contained
GFDS400-G1 850-05	27-06-2022	4062172194747	No declarable substances contained
GFDS400-G1 857-01	24-06-2022	4062172207935	No declarable substances contained
GFDS400-G1 857-05	29-03-2024		
GFDS600-G1 827-01	27-06-2022	4062172207959	No declarable substances contained
GFDS600-G1 827-05	27-06-2022	4062172194969	No declarable substances contained
GFDS600-G1 830-01	27-06-2022	4062172207973	No declarable substances contained
GFDS600-G1 830-05	27-06-2022	4062172194983	No declarable substances contained
GFDS600-G1 835-01	27-06-2022	4062172207997	No declarable substances contained
GFDS600-G1 835-05	27-06-2022	4062172195003	No declarable substances contained
GFDS600-G1 840-01	13-05-2022	4062172208017	No declarable substances contained
GFDS600-G1 840-05	13-05-2022	4062172195027	No declarable substances contained
GFDS600-G1 850-01	27-06-2022	4062172208031	No declarable substances contained
GFDS600-G1 850-05	29-03-2024		

Hoja de datos gama de productos

Descripción del producto	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
GFDS600-G1 857-01	27-06-2022	4062172208055	No declarable substances contained
GFDS600-G1 857-05	29-03-2024		

Descripción del producto	Declaration No. in SCIP database
GFDS400-G1 827-05	No declarable substances contained
GFDS400-G1 830-01	No declarable substances contained
GFDS400-G1 830-05	No declarable substances contained
GFDS400-G1 835-01	No declarable substances contained
GFDS400-G1 835-05	No declarable substances contained
GFDS400-G1 840-01	No declarable substances contained
GFDS400-G1 840-05	No declarable substances contained
GFDS400-G1 850-01	No declarable substances contained
GFDS400-G1 850-05	No declarable substances contained
GFDS400-G1 857-01	No declarable substances contained
GFDS400-G1 857-05	In work
GFDS600-G1 827-01	No declarable substances contained
GFDS600-G1 827-05	No declarable substances contained
GFDS600-G1 830-01	No declarable substances contained
GFDS600-G1 830-05	No declarable substances contained
GFDS600-G1 835-01	No declarable substances contained
GFDS600-G1 835-05	No declarable substances contained
GFDS600-G1 840-01	No declarable substances contained
GFDS600-G1 840-05	No declarable substances contained
GFDS600-G1 850-01	No declarable substances contained
GFDS600-G1 850-05	In work
GFDS600-G1 857-01	No declarable substances contained
GFDS600-G1 857-05	In work

Hoja de datos gama de productos

Consejos de aplicación

Para más información detallada sobre la aplicación y gráficos vea la hoja de datos del producto.

Soporte ventas y técnico

Soporte ventas y técnico www.osram.es

Descarga datos

Fichero	
	User instruction GinoLED Diffuse White Flex
	Declaración de conformidad GFD SW TW CE 4283939 180823
	Declaración de conformidad GINOLED FD TW UK CE 4237513 040221
	IES data GFDS400-G1-830-01 IES
	IES data GFDS400-G1-835-01 IES
	IES data GFDS400-G1-840-01 IES
	IES data GFDS400-G1-850-01 IES
	IES data GFDS400-G1-857-01. IES
	IES data GFDS600-G1-827-01 IES
	IES data GFDS600-G1-830-01 IES
	IES data GFDS600-G1-835-01 IES
	IES data GFDS600-G1-840-01 IES
	IES data GFDS600-G1-850-01 IES
	IES data GFDS600-G1-857-01

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Código del producto	Descripción del producto	Unidad de embalaje (Piezas/unidad)	Dimensiones (largo x ancho x alto)	Volúmen	Peso bruto
4062172194242	GFDS400-G1 827-05	Embalaje de envío 3	475 mm x 360 mm x 145 mm	24.80 dm ³	4530.00 g
4062172207850	GFDS400-G1 830-01	Embalaje de envío 20	615 mm x 425 mm x 425 mm	111.08 dm ³	7400.00 g
4062172194648	GFDS400-G1 830-05	Embalaje de envío 3	475 mm x 360 mm x 145 mm	24.80 dm ³	4530.00 g
4062172207874	GFDS400-G1 835-01	Embalaje de envío 20	605 mm x 425 mm x 425 mm	109.28 dm ³	7400.00 g
4062172194709	GFDS400-G1 835-05	Embalaje de envío 3	475 mm x 360 mm x 145 mm	24.80 dm ³	4530.00 g
4062172207898	GFDS400-G1 840-01	Embalaje de envío 20	615 mm x 425 mm x 425 mm	111.08 dm ³	7400.00 g
4062172194723	GFDS400-G1 840-05	Embalaje de envío 3	475 mm x 360 mm x 145 mm	24.80 dm ³	4530.00 g
4062172207911	GFDS400-G1 850-01	Embalaje de envío 20	605 mm x 425 mm x 425 mm	109.28 dm ³	7400.00 g
4062172194747	GFDS400-G1 850-05	Embalaje de envío 3	475 mm x 360 mm x 145 mm	24.80 dm ³	4530.00 g
4062172207935	GFDS400-G1 857-01	Embalaje de envío 20	605 mm x 425 mm x 425 mm	109.28 dm ³	7400.00 g
4062172194761	GFDS400-G1 857-05	Embalaje de envío 3	475 mm x 360 mm x 145 mm	24.80 dm ³	4530.00 g

Hoja de datos gama de productos

Logistical Data

4062172207959	GFDS600-G1 827-01	Embalaje de envío 20	615 mm x 425 mm x 425 mm	111.08 dm ³	7400.00 g
4062172194969	GFDS600-G1 827-05	Embalaje de envío 3	475 mm x 360 mm x 145 mm	24.80 dm ³	4530.00 g
4062172207973	GFDS600-G1 830-01	Embalaje de envío 20	615 mm x 425 mm x 425 mm	111.08 dm ³	7400.00 g
4062172194983	GFDS600-G1 830-05	Embalaje de envío 3	475 mm x 360 mm x 145 mm	24.80 dm ³	4530.00 g
4062172207997	GFDS600-G1 835-01	Embalaje de envío 20	605 mm x 425 mm x 425 mm	109.28 dm ³	7400.00 g
4062172195003	GFDS600-G1 835-05	Embalaje de envío 3	475 mm x 360 mm x 145 mm	24.80 dm ³	4530.00 g
4062172208017	GFDS600-G1 840-01	Embalaje de envío 20	615 mm x 425 mm x 425 mm	111.08 dm ³	7400.00 g
4062172195027	GFDS600-G1 840-05	Embalaje de envío 3	475 mm x 360 mm x 145 mm	24.80 dm ³	4530.00 g
4062172208031	GFDS600-G1 850-01	Embalaje de envío 20	605 mm x 425 mm x 425 mm	109.28 dm ³	7400.00 g
4062172195041	GFDS600-G1 850-05	Embalaje de envío 3	475 mm x 360 mm x 145 mm	24.80 dm ³	4530.00 g
4062172208055	GFDS600-G1 857-01	Embalaje de envío 20	605 mm x 425 mm x 425 mm	109.28 dm ³	7400.00 g
4062172195096	GFDS600-G1 857-05	Embalaje de envío 3	475 mm x 360 mm x 145 mm	24.80 dm ³	4530.00 g

El código del producto mencionado describe la unidad más pequeña de la cantidad que se puede pedir. Una unidad de envío puede contener uno o más productos individuales. Al cursar un pedido, introduzca la cantidad de la unidad de envío o su múltiple.

Aviso

Sujeto a cambios sin aviso. Excepto errores y omisiones. Asegúrese de utilizar la emisión más reciente.