


BackLED M CP G5 HF

Módulos LED para iluminación publicitaria y trasera

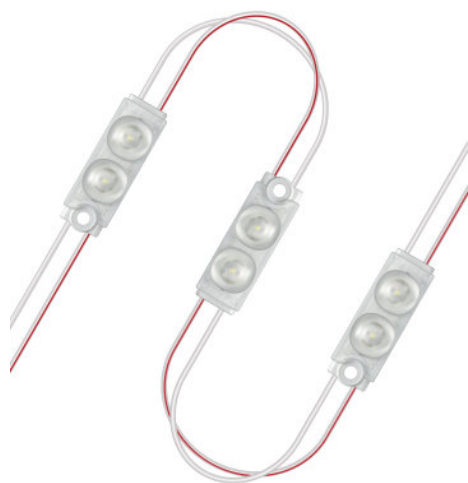

Características del producto

- LED chain comprising 40 LED modules connected by flexible cables
- Each LED module contains 2 LEDs
- LED module pitch variable between 60 and ~ 200 mm
- Compatible with OSRAM OPTOTRONIC constant voltage drivers / dimmers
- Color consistency in 3 SDCM
- Patented Square Lens technology
- Wide CCT and color options available
- IP66 rating
- Lifetime (L80/B10): 50,000 h (temperature at $T_c = 70^\circ\text{C}$)
- 5-year warranty @ $T_a = 70^\circ\text{C}$

Beneficios del producto

- Uniform light pattern design for 60-200 mm lightbox depth
- Backside injection technology for high protection level
- Halogen free without gas hazard
- Flammability resistance material selection fit UL-94 V0

Áreas de aplicación

- Channel letters
- Signage boxes
- Luminous areas and ceilings

Hoja de datos gama de productos

Consejos de aplicación

Para más información detallada sobre la aplicación y gráficos vea la hoja de datos del producto.

Texto de la hoja técnica

- The expected lifetime may be reduced or the LED modules may be destroyed if the maximum operating and storage temperature ratings are exceeded;
 - The temperature of the LED modules must be measured at the Tc-point in accordance with EN 60598-1 in a thermally constant status with a temperature sensor or a temperature-sensitive label must be available. For the exact location of the Tc-point see User Instructions of the product;
-

Soporte ventas y técnico

Soporte ventas y técnico www.osram.es

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
 - Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
 - In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
 - Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.
-

Aviso

Sujeto a cambios sin aviso. Excepto errores y omisiones. Asegúrese de utilizar la emisión más reciente.